



## Outstanding rough terrain driving features

- Differential wheel lock
- Up to 4 simultaneous, proportional movements
- Dual load capacity
- 2 axis jib rotation

## Optimized serviceability

- Fully modular basket for quick and easy repairs
- Easy access to all components
- Self-diagnosis tool integrated on the lower control box

## Increased safety

- Optional Haulotte Activ'Shield™ Bar
- Smooth and precise controls
- Strong, quick, and maneuverable boom





# HT132 RTJ PRO




ROUGH TERRAIN TELESCOPIC BOOMS

## TECHNICAL DATA

## HT132 RTJ PRO

Working height	138 ft 5 in
Platform height	131 ft 11 in
Horizontal outreach	66 ft 3 in
Lift capacity	500-990 lbs
<b>F</b> x <b>G</b> Platform size	8 ft x 3 ft
<b>H</b> Length	48 ft 7 in
<b>A</b> Length - storage	40 ft 4 in
<b>B</b> Overall width	8 ft 2 in
Width - with extended axles	10 ft 10 in
<b>C</b> Height - stowed	10 ft
Horizontal jib rotation	150° (+75°/-75°)
Vertical jib rotation	140° (+70°/-70°)
Platform rotation	180° (+90°/-90°)
Turntable rotation	360° continuous
Tailswing	9 ft 2 in
<b>D</b> Wheelbase	11 ft 6 in
<b>E</b> Ground clearance	15 in
Tilt alarm	3°
Drive speed	0.2 - 3.1 mph
Gradeability	40 %
Turning radius - outside	18 ft 10 in
Tires	445/65-22.5
Engine	PERKINS Tier 3, 62,5 kW - 85 hp
Weight	47187 lbs

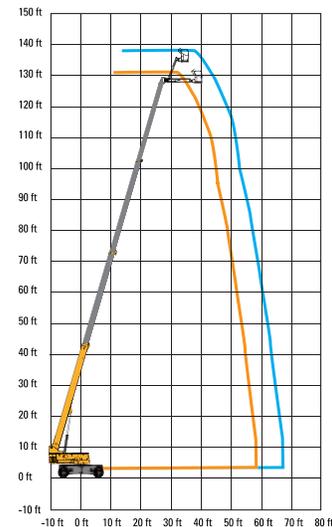

## STANDARD EQUIPMENT

- 4 wheel drive and 4 wheel steer
- Front oscillating axle
- 2 extendable axles
- Differential wheel lock
- Fully proportional controls
- 4 simultaneous movements
- Dual load capacity 500 lbs (2 persons) - 990 lbs (3 persons)
- Standard modular large platform with swing door entry gate
- Upper control box protection cover and tool tray in plastic ultra-solid material
- AC power to the platform
- Safe to use in winds up to 37 mph
- Tilt / load alarm and light
- Electric pump system and emergency descent
- 12V battery / electrical control system
- Towing hooks
- Hourmeter
- Low fuel level indicator (upper control box)
- Engine pre-heater with light indicator
- Basket compensation +/-10°
- Travel alarm
- Flashing drive beacon
- Swing out engine tray
- Haulotte Activ'Shield™ Bar (standard or optional depending on countries)
- 2 axis jib rotation

## OPTIONS AND ACCESSORIES

- On-board 3.5 kW hydraulic generator
- Hydraulic oil cooler
- Hydraulic oil in tank and circuit for warm countries
- Biodegradable hydraulic oil
- Automatic overspeed air shutdown valve (electric one-way valve, flame arrester, spark arrester)
- Cold weather kit
- Air line to the platform
- Cap with key for diesel tank
- 55W platform worklight
- Glazier pack
- Pipe cradle
- Lateral swing door entry gate (Standard on US machines)
- Haulotte Activ'Shield™ Bar (standard or optional depending on countries)
- Welder and welder support

